

SALDA

Sensor controller STOUCH

- (S) simple service
- (T) ouch sensory
- (O) ptimal comfort
- (U) ltra easy usage
- (C) onnectable to BMS network
- (H) ighly recommended for SALDA EKO AHU



User control level


- User can easily set sound, temperature, sleep mode and CO₂ level parameters.
- Numerical display for setting functions and supply air temperature view.
- Symbolical display of active alarms: A.01, A.02, etc., and LED indication.
- Fast button for maximum speed setting.
- Selected speed LED indication.
- Sleep mode to reduce power consumption.
- "Child safety lock" - ON/OFF controller lock.
- Filter timer's setting/resetting.
- Reviewing and resetting alarms.
- CO₂ sensor ON/OFF.
- Boost function ON/OFF.

Service control level

- Speed control type setting: 0...100% / 4 Fixed speeds / 4 Fixed pressure values.
- Switch "OFF" locking of the selected ventilation system (fan always operate at minimum speed 1).
- Boost speed setting.
- Sensor type setting: CO₂/pressure.
- Controller operates as Modbus Master/Slave.

Technical data

- Dimensions (WxHxL) 84x84x22 mm

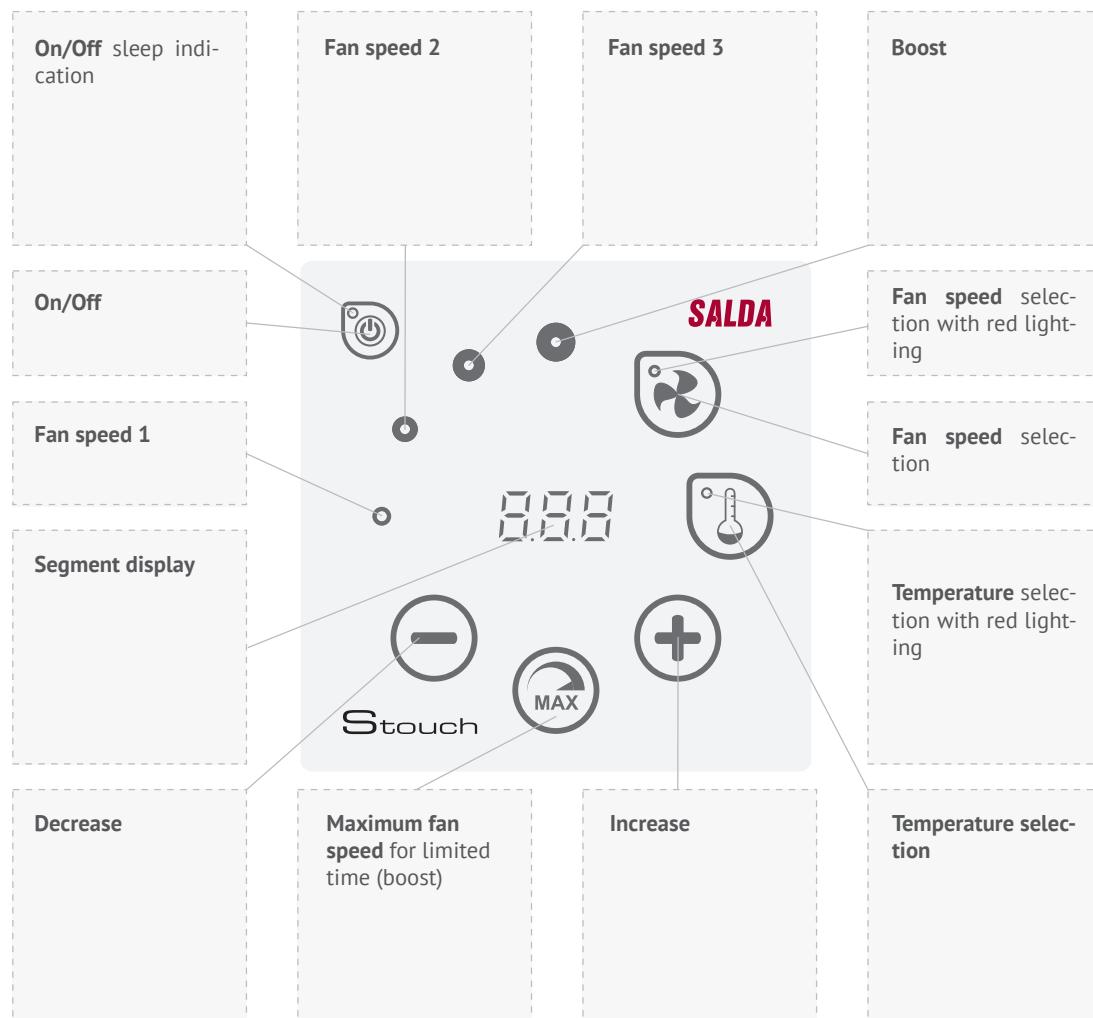

Get in touch

Ragainės g. 100
Šiauliai, Lithuania

Ph. +370 41 540 415
Fax. +370 41 540 417

Email: office@salda.lt
www.salda.lt